

**TABELLA CONTENUTO BOBINE IN METRI (INDICATIVO)
(CON E SENZA CHIOCCIOLA, VEDERE LEGENDA):**

SIGLE E NORME

DIAMETRO ESTERNO CAVO [mm]	DIAMETRO FLANGIA BOBINA [mm] E PORTATA MASSIMA (kg)									
	600 (UNI06)	800 (UNI08)	1000 (UNI10)	1200 (UNI12)	1400 (UNI14)	1600 (UNI16)	1800 (UNI18)	2000 (UNI20)	2200 (UNI22)	2500 (UNI25)
	250	600	1300	1700	2500	4000	5000	6000	6500	7000
8.0	1000	2120	4080							
8.5	880	1900	3690							
9.0	780	1700	3210	2870	5410					
9.5	690	1520	2900	4780						
10.0	660	1370	2640	4370						
10.5	580	1230	2390	4000						
11.0	510	1100	2170	1920	3670	3140				
11.5	490	980	1960	3360	5420					
12.0	420	930	1750	3080	5000					
12.5	410	840	1710	2790	4610					
13.0	360	800	1540	1350	2580	2290	3790			
13.5	340	710	1390	2370	3910	5840				
14.0	330	690	1340	2160	3770	5370				
14.5	290	610	1210	2080	3470	4960				
15.0	280	590	1170	1010	1900	1670	3200	2830	4800	
16.0	230	500	1020	1680	2840	4070	5950			
17.0	220	470	880	760	1480	1290	2540	2230	3630	5000
18.0	170	400	760	1290	2230	3240	3200	4450	5590	
19.0	160	370	710	610	1130	1070	2000	1760	2880	2520
20.0	160	310	630	1090	1770	2570	3760	3700	4210	5000
21.0	130	300	580	500	940	820	1570	1490	2450	2130
22.0	120	250	510	910	1520	2180	2900	2900	3340	2900
23.0	120	240	490	400	800	680	1350	1160	1940	1800
24.0		230	410	400	770	680	1200	1160	1800	1800
25.0		190	400	360	670	630	1150	980	1640	1530
26.0		180	380	300	640	630	1010	980	1580	1530
27.0		180	320	300	560	500	970	820	1390	1300
28.0		170	310	300	540	500	940	820	1340	1300
29.0			300	240	520	430	820	750	1180	1100
30.0			290	240	440	430	800	750	1140	1100
31.0			240	220	430	400	770	650	1100	930
32.0			230	220	410	400	670	650	960	930
33.0			220	210	400	330	650	540	930	840
34.0			220	210	340	330	630	540	900	840
35.0			210	210	330	310	540	510	880	730
36.0			170	210	320	310	530	510	760	730
37.0			160	210	270	250	510	420	730	690
38.0			160	210	260	250	430	420	710	690
39.0			160	210	250	240	420	400	610	570
40.0			150	210	250	240	410	400	590	570
41.0			150	210	240	230	400	380	580	540
42.0			110	210	230	230	390	380	560	540
43.0				210	230	230	380	300	550	440
44.0				190	230	230	320	300	540	440
45.0				180	230	280	310	280	450	420
46.0				170	230	280	300	280	440	420
47.0				170	230	280	300	280	430	400
48.0				170	230	280	290	280	410	400
49.0				170	230	260	290	260	410	390
50.0				160	230	260	280	260	410	390
51.0				160	230	260	230	260	400	350
52.0				120	230	260	230	260	320	350

DIAMETRO ESTERNO CAVO [mm]	DIAMETRO FLANGIA BOBINA [mm] E PORTATA MASSIMA (kg)									
	600 (UNI06)	800 (UNI08)	1000 (UNI10)	1200 (UNI12)	1400 (UNI14)	1600 (UNI16)	1800 (UNI18)	2000 (UNI20)	2200 (UNI22)	2500 (UNI25)
	250	600	1300	1700	2500	4000	5000	6000	6500	7000
53.0				120	220	320	470	630	710	1050
54.0				120	200	310	460	610	700	1030
55.0					200	300	450	600	680	1010
56.0					200	300	440	490	670	990
57.0					200	290	430	480	660	980
58.0					200	290	430	480	650	840
59.0					200	280	420	470	640	830
60.0					200	280	420	470	640	830
61.0					150	280	320	450	510	800
62.0					150	220	320	440	500	780
63.0					150	210	310	440	490	770
64.0					150	210	310	430	490	760
65.0					140	200	300	420	480	750
66.0					140	200	300	420	470	630
67.0					140	200	290	330	470	620
68.0					140	200	290	320	460	610
69.0						190	280	320	450	600
70.0						190	280	310	440	590
71.0						180	200	300	350	580
72.0						180	200	300	340	570
73.0						130	200	300	340	570
74.0						130	200	290	330	470
75.0						130	190	290	330	460
76.0						130	190	290	320	450
77.0						130	190	280	320	450
78.0						130	190	280	320	440
79.0						120	180	200	310	440
80.0						120	180	200	310	430
81.0						120	180	200	300	420
82.0						120	180	200	300	420
83.0						110	170	190	300	410
84.0						110	170	190	290	410
85.0						110	170	190	290	400
86.0							170	190	210	400
87.0							170	190	210	400
88.0							160	180	210	390
89.0							160	180	210	310
90.0							160	180	200	300
91.0							160	180	200	300
92.0							160	170	200	300
93.0										270
95.0										260
97.0										260
99.0										250
101.0										250
103.0										240
105.0										240

SIGLE E NORME

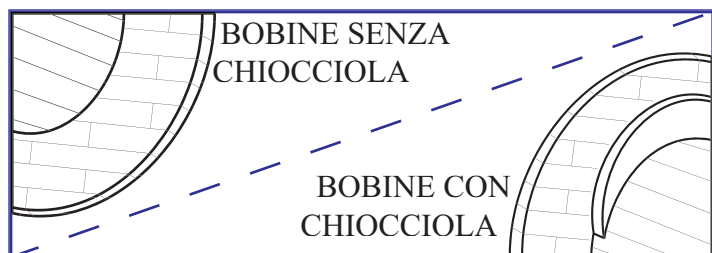


TABELLA CONTENUTO METRI PALLET STANDARD (CAVI UNIPOLARI SENZA GUAINA, DOVE PREVISTO)

Sezione [mm²]	0.50	0.75	1	1.5	2.5	4	6
Termoretraibile [m]	-	-	26400	26400	19200	19200	19200
Scatola [m]	24000	24000	24000	24000	19200	12000	6000

